

FIG. 1

This diagram shows an exploded perspective view of a mechanical assembly. At the top is a rectangular housing (1003) with a large rectangular opening on its front face. Below the housing, a circular gear (1017) is shown, which is part of a larger circular component (1005). To the right of the gear is a circular flange (1021) with a central hole (1019). Below the flange is another circular component (1005) with a protruding feature. A dashed line indicates the alignment of the gear (1017) with the housing (1003). A label 1015 points to the gear (1017).

FIG. 2

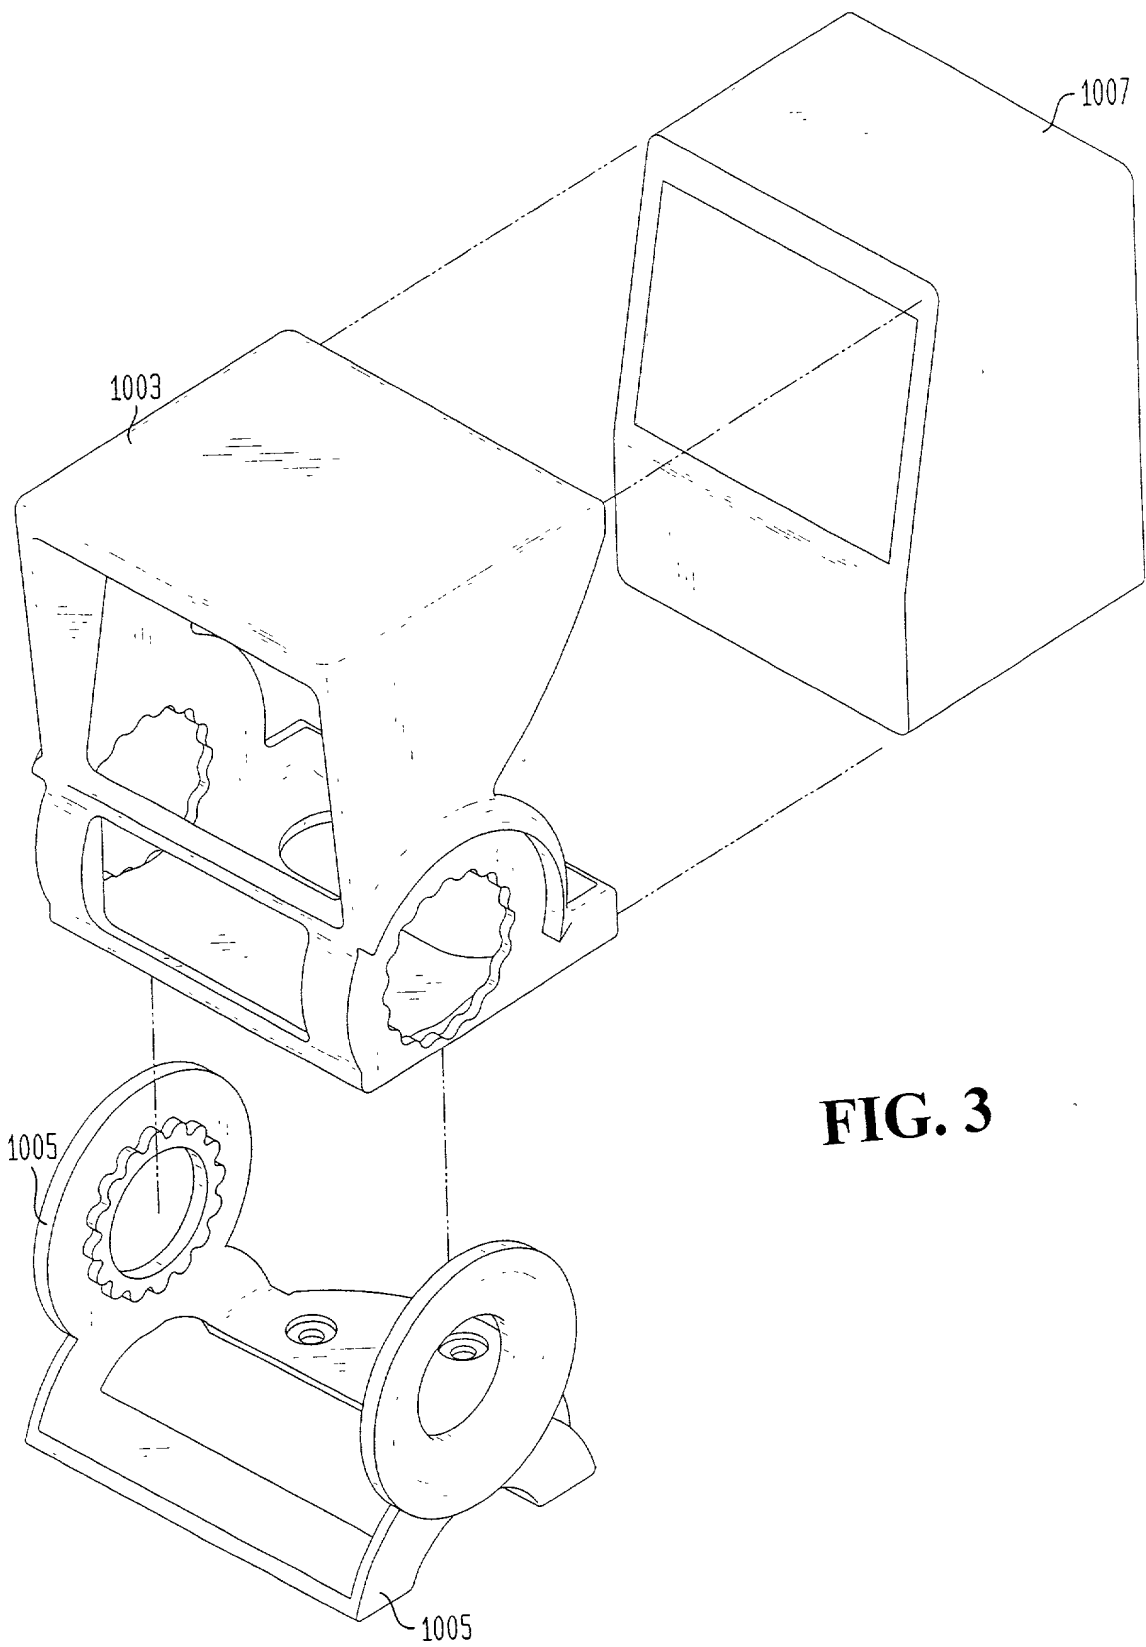


FIG. 3

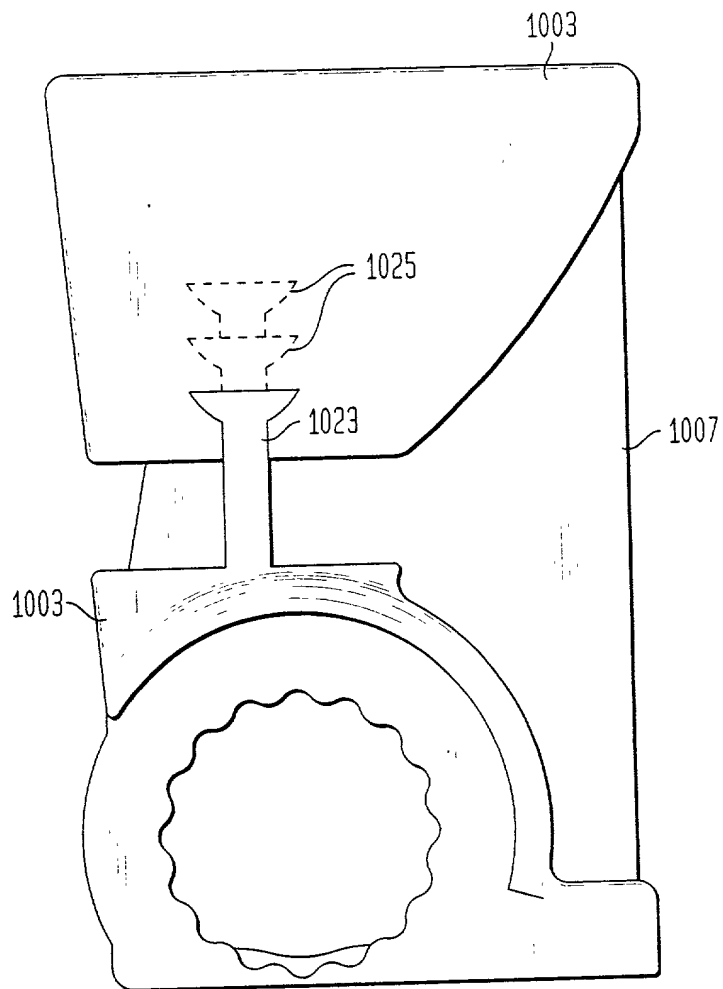


FIG. 4

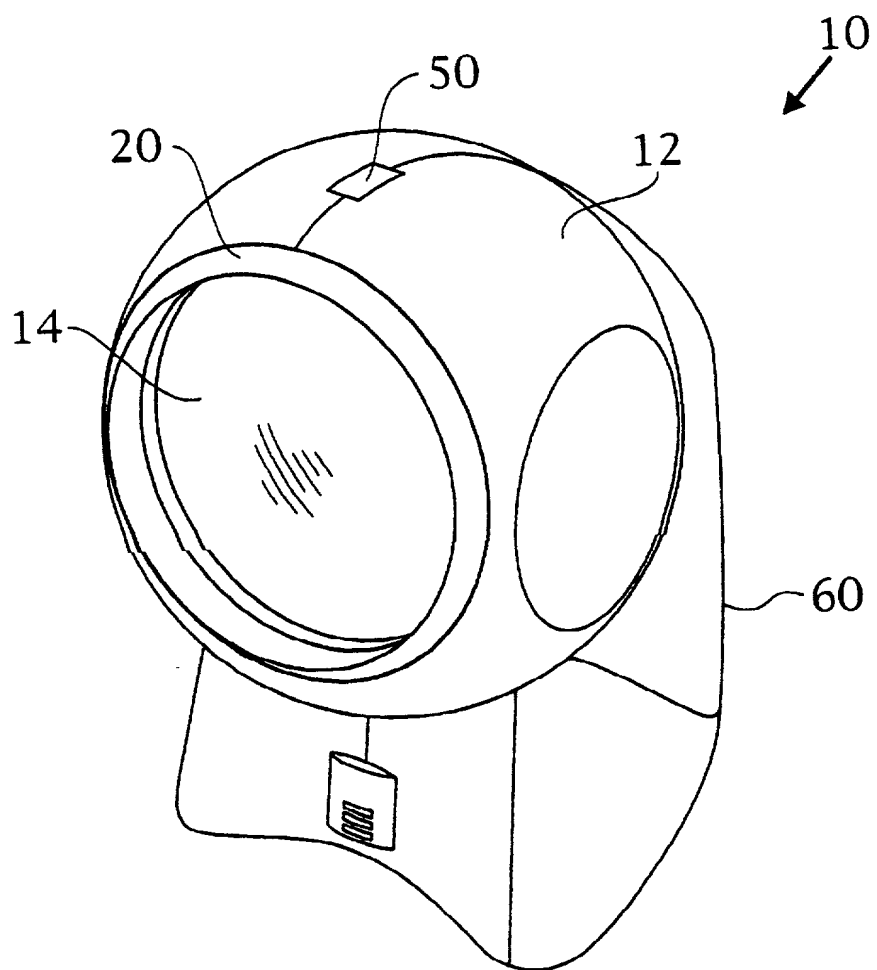


FIG. 5

FIG. 1 is a perspective view of a protective garment 10, such as a hood or mask. The garment features a front panel 12, side panels 15 and 17, and a bottom panel 60. A circular opening 86 is visible at the bottom center of the front panel.

-86

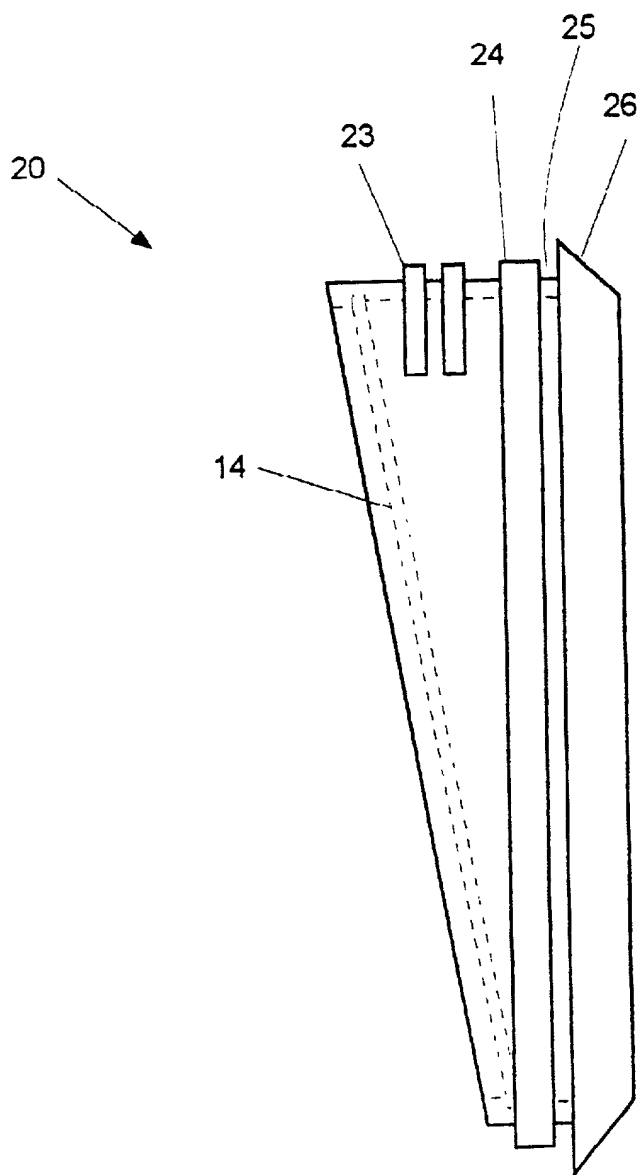


FIG. 7

20046900-0110

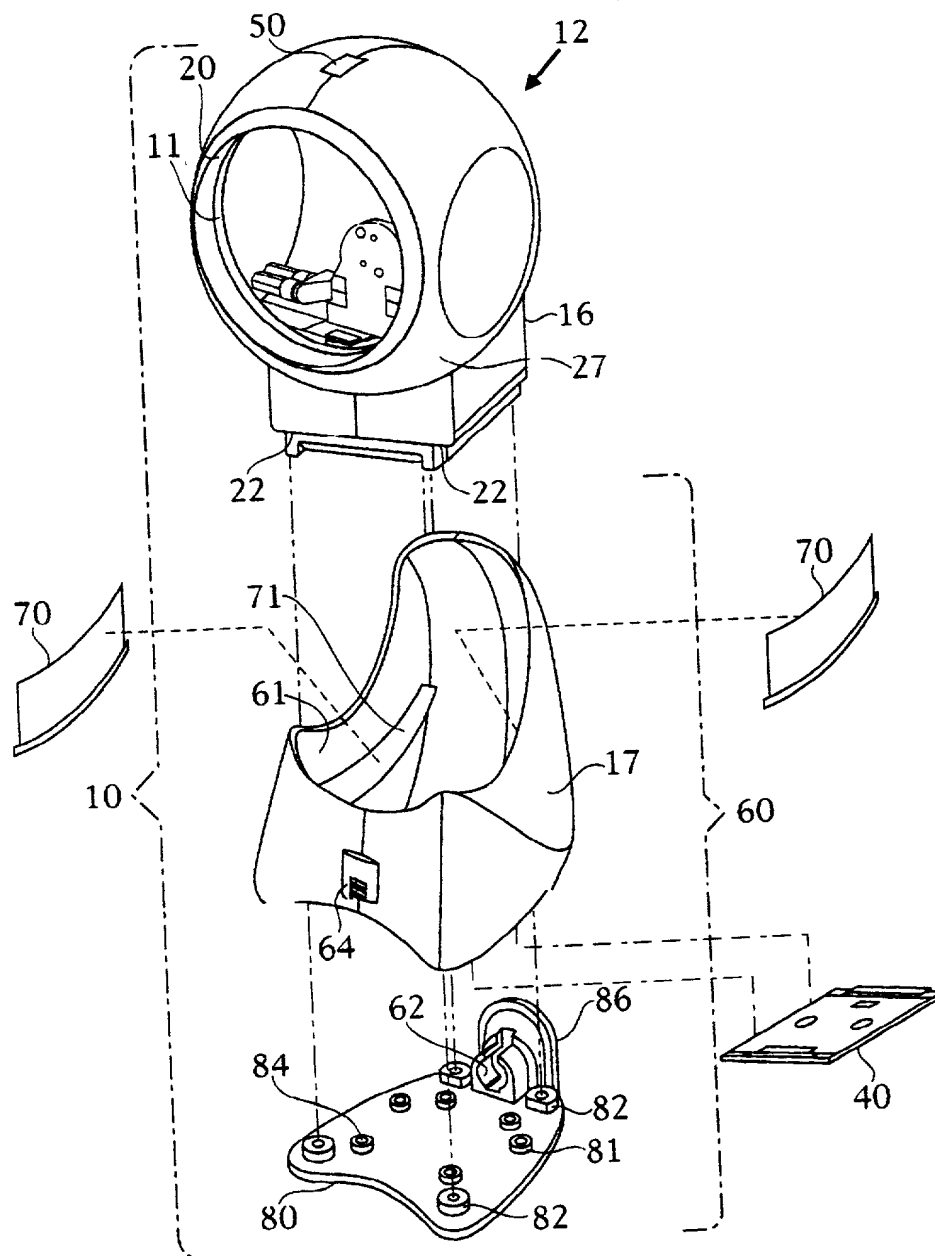


FIG. 8

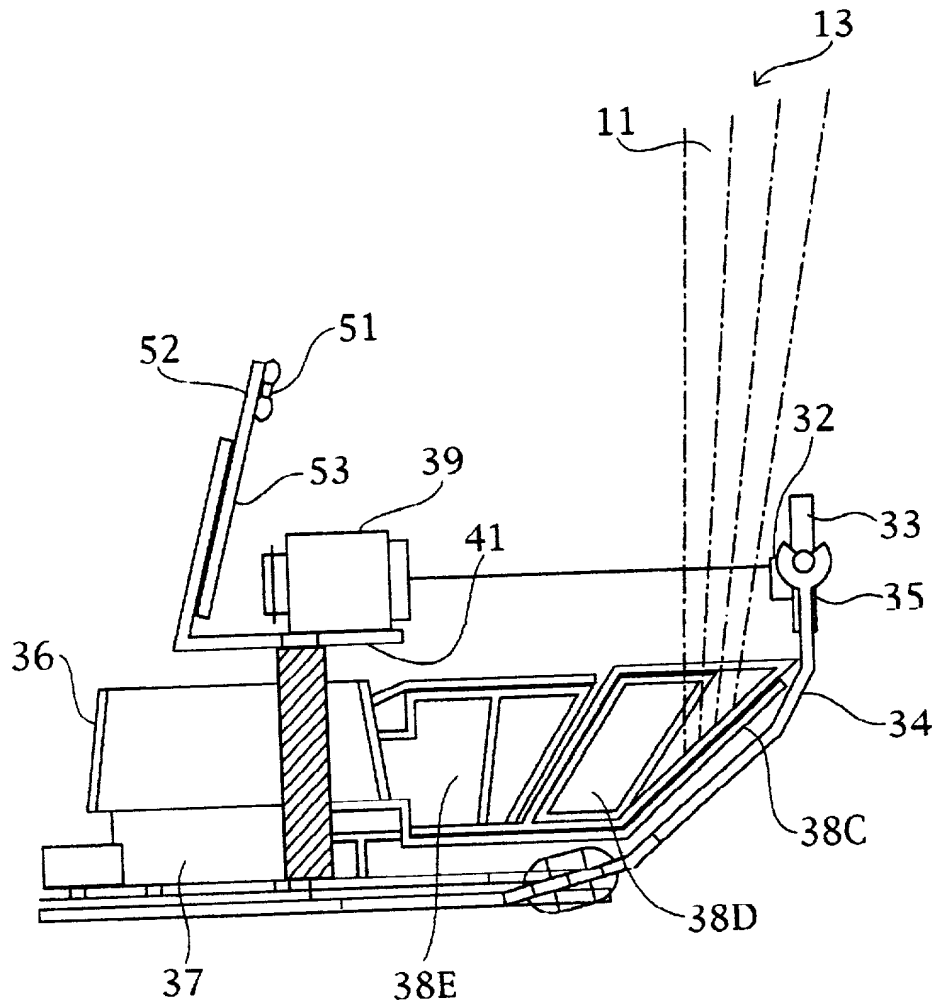


FIG. 11

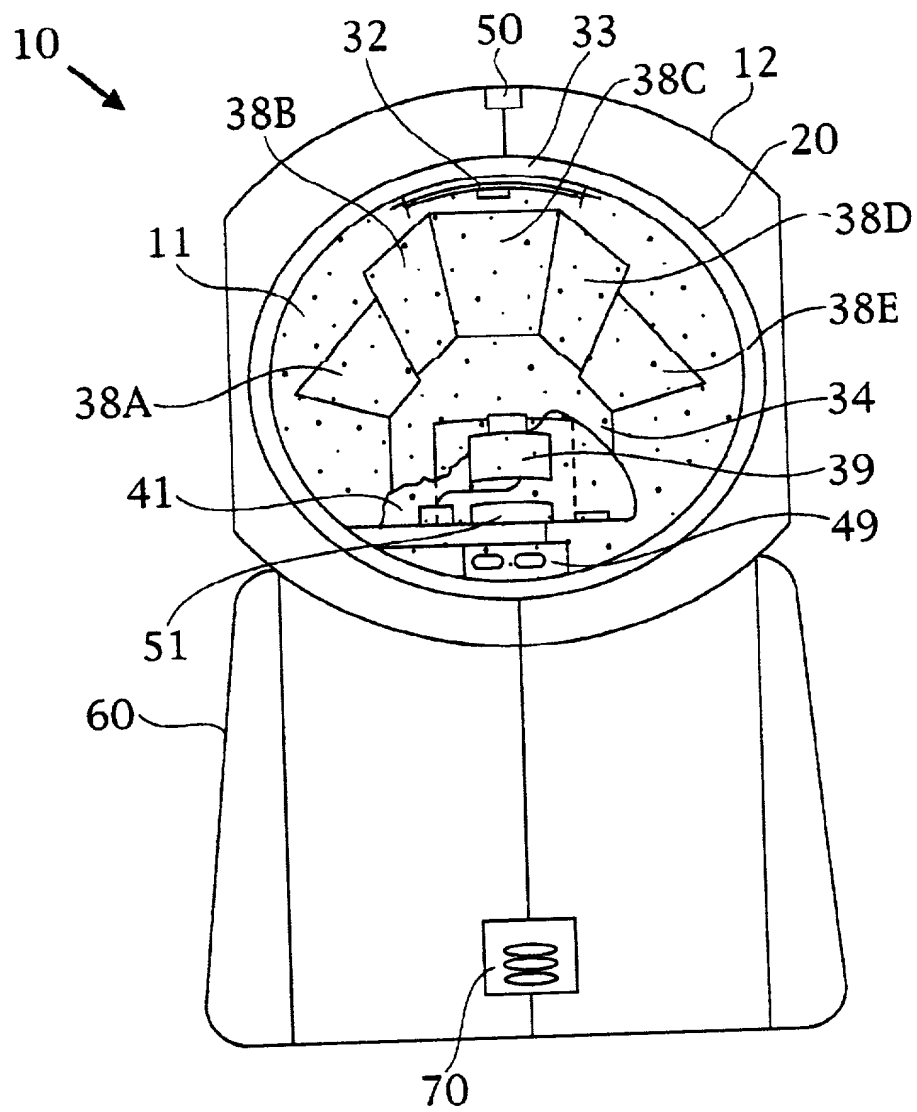


FIG. 12

FIG. 13

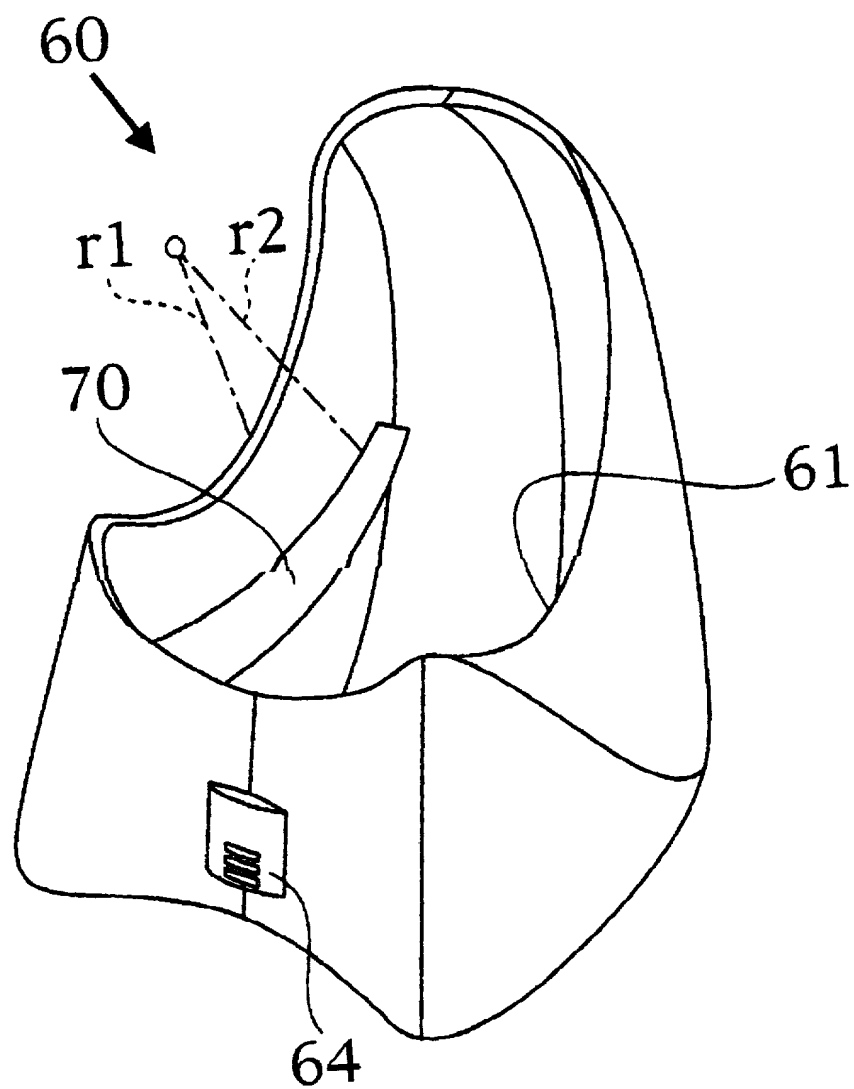


FIG. 14

2011-09-09 09:00:00

1027

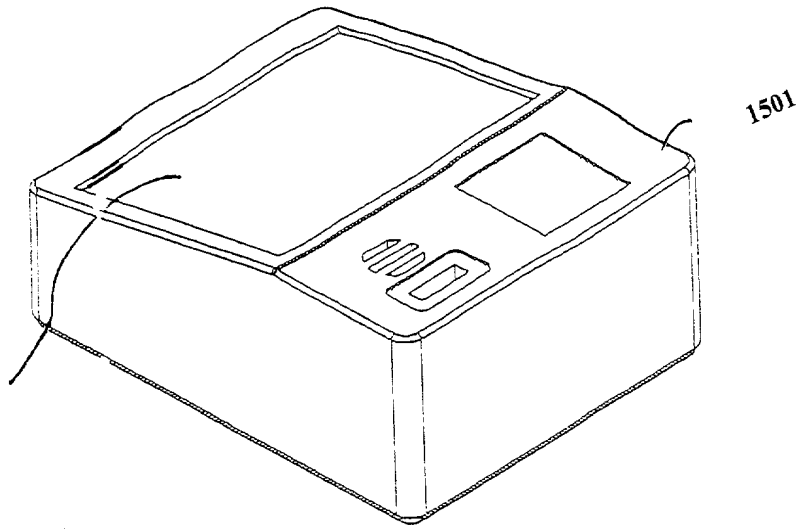
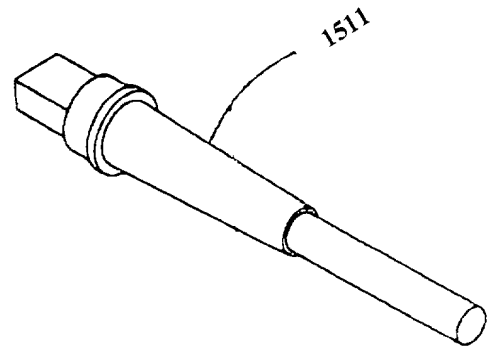


FIG. 15



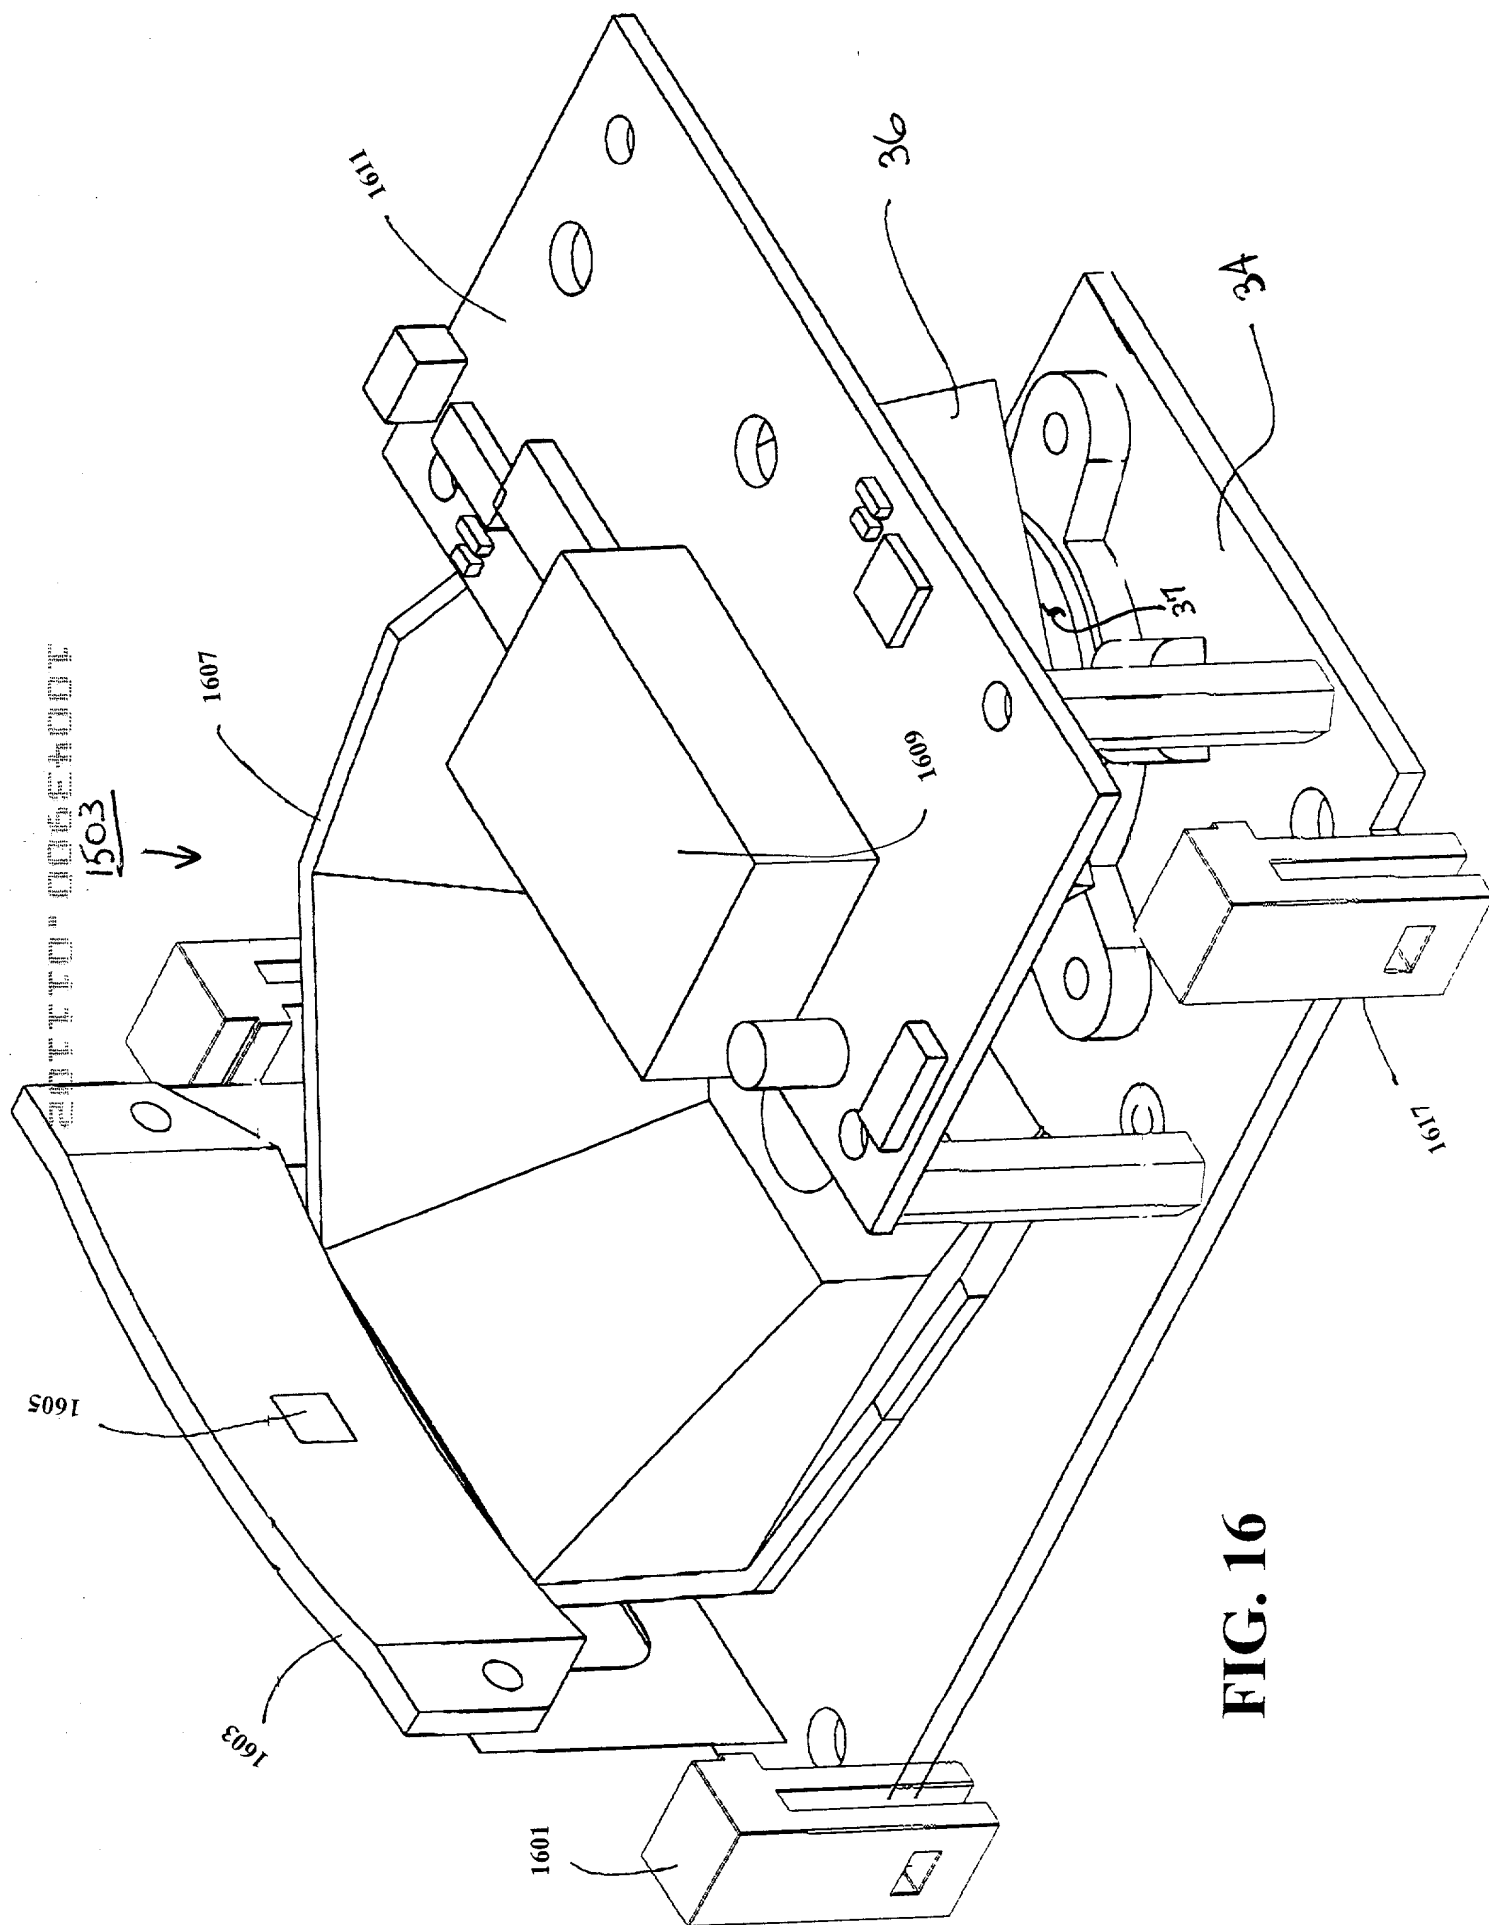


FIG. 16

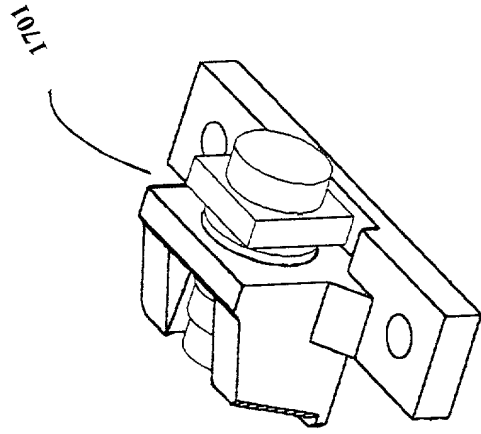


FIG. 17

20170701-014102

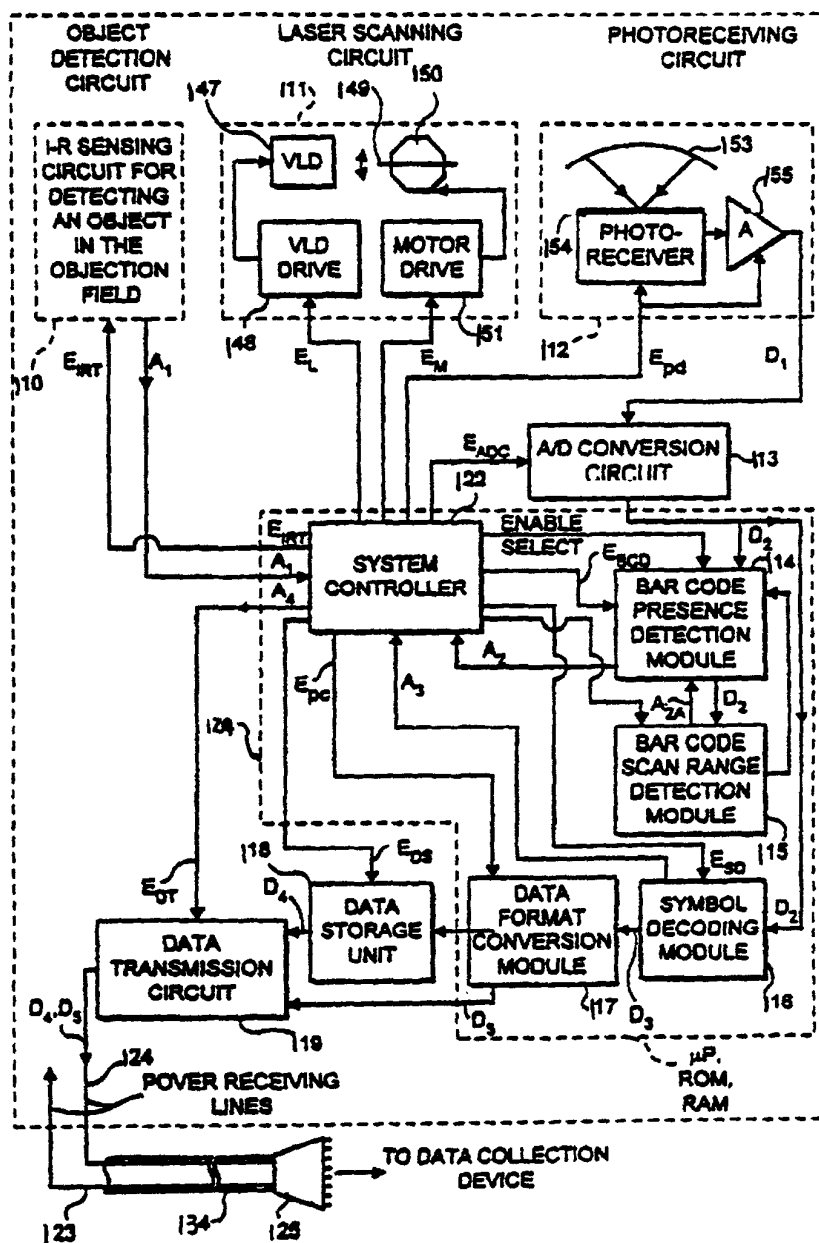


FIG. 18

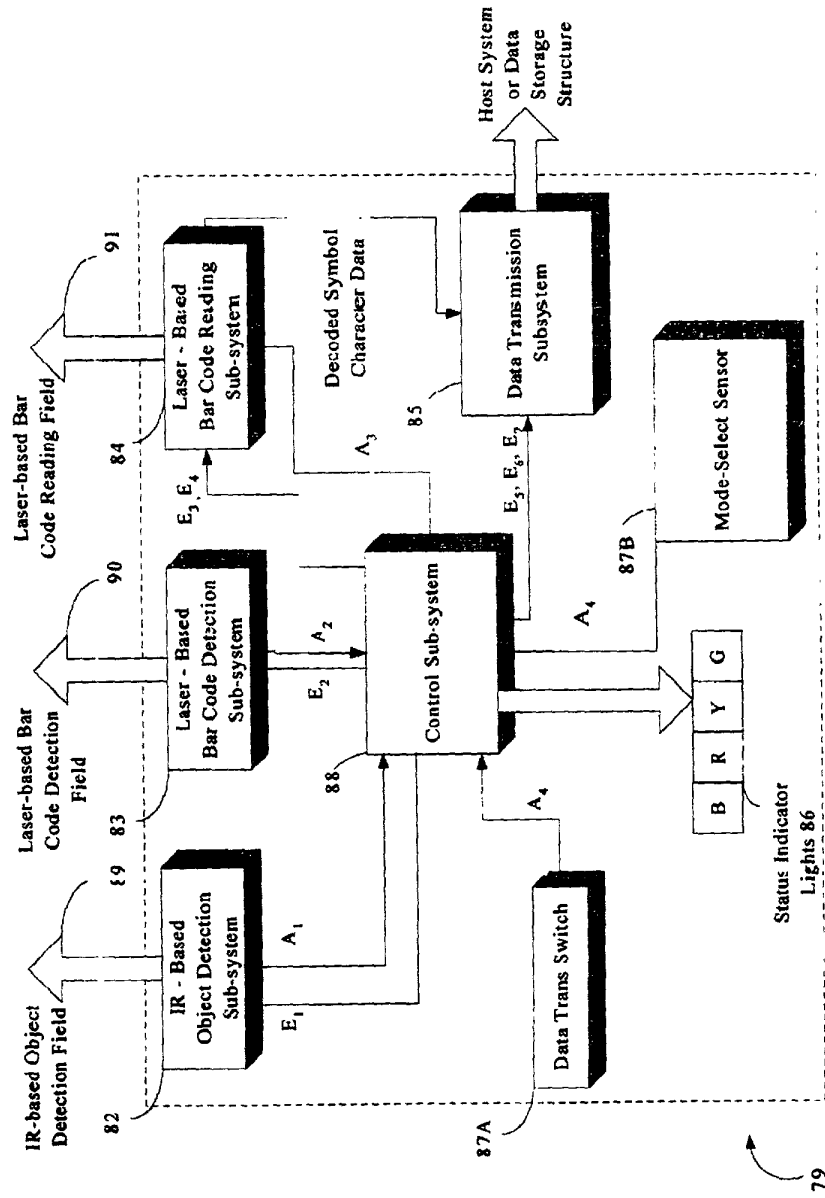


FIG. 19

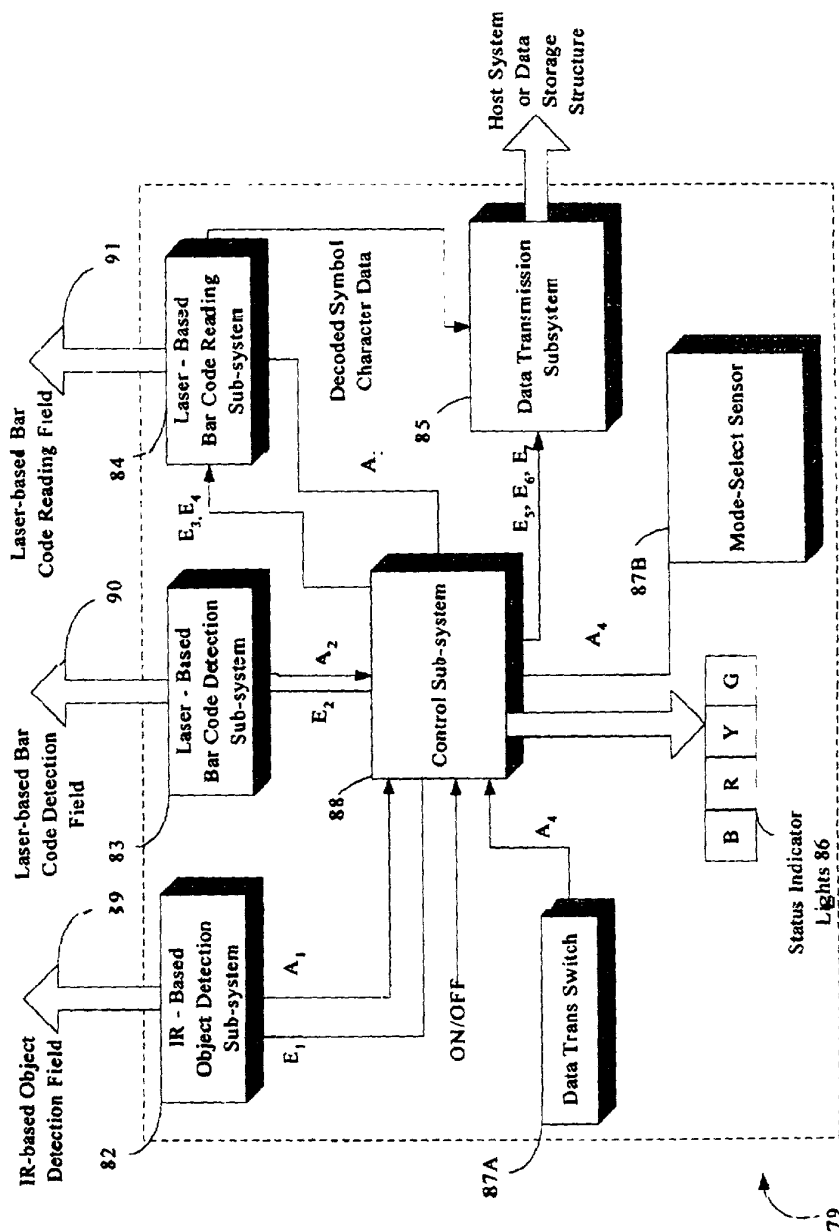


FIG. 20

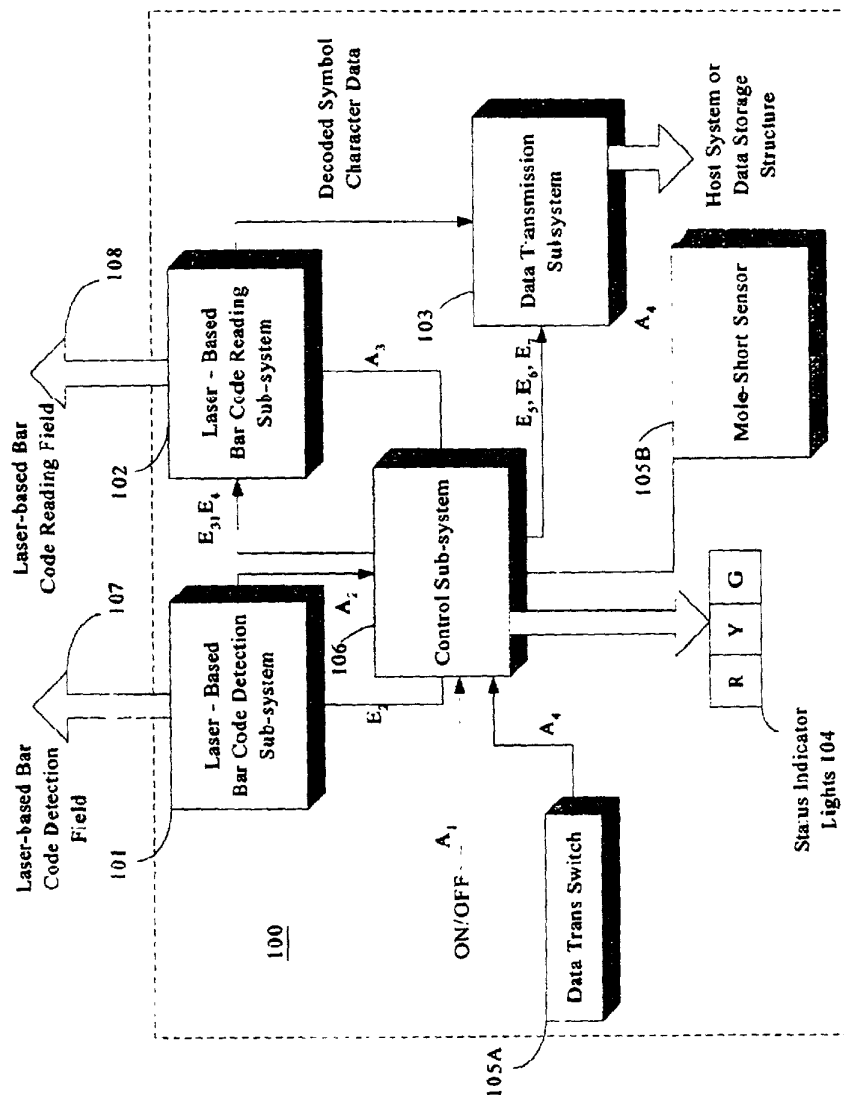


FIG. 21

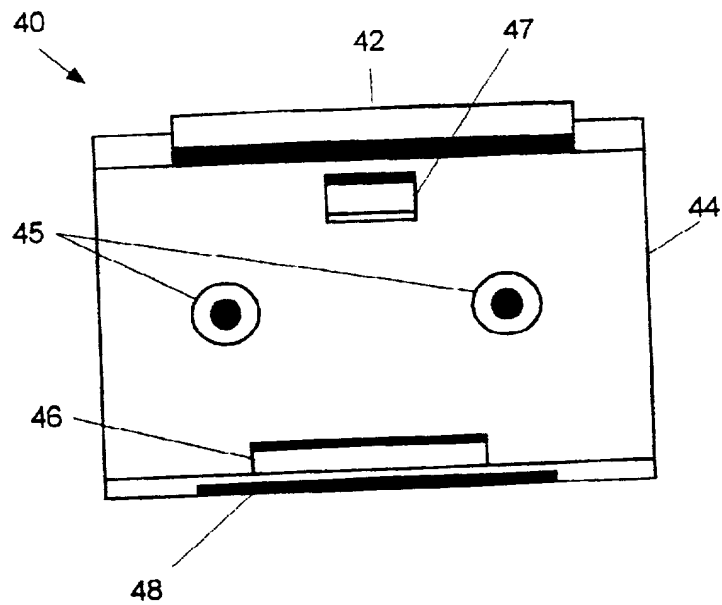


FIG. 22

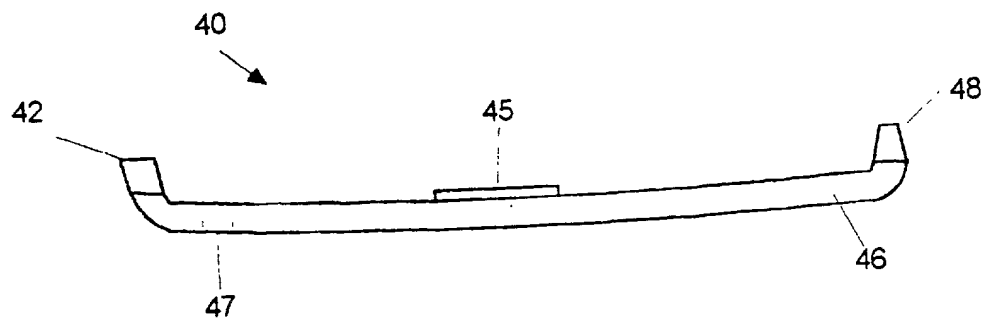


FIG. 23

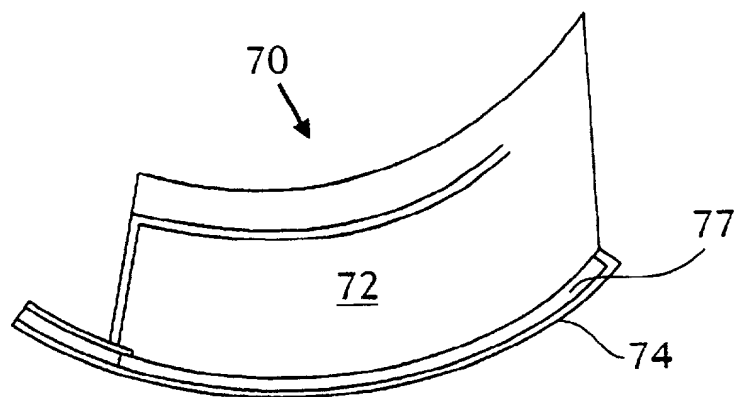


FIG. 24

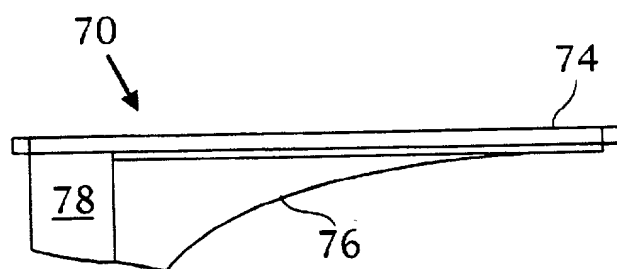


FIG. 25

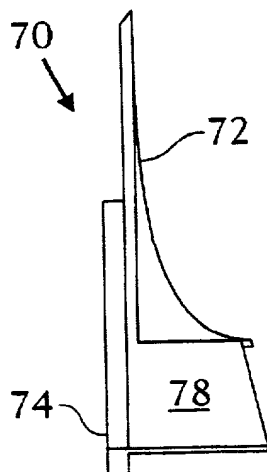


FIG. 26

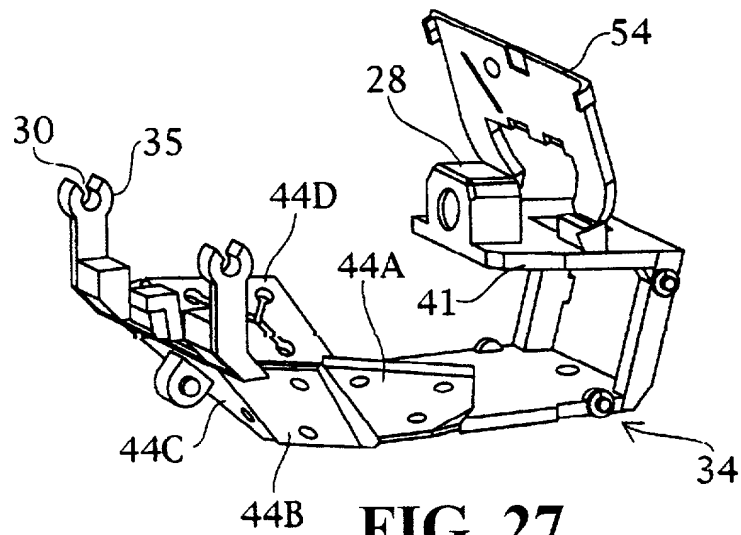


FIG. 27

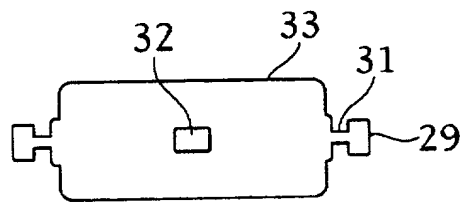


FIG. 28

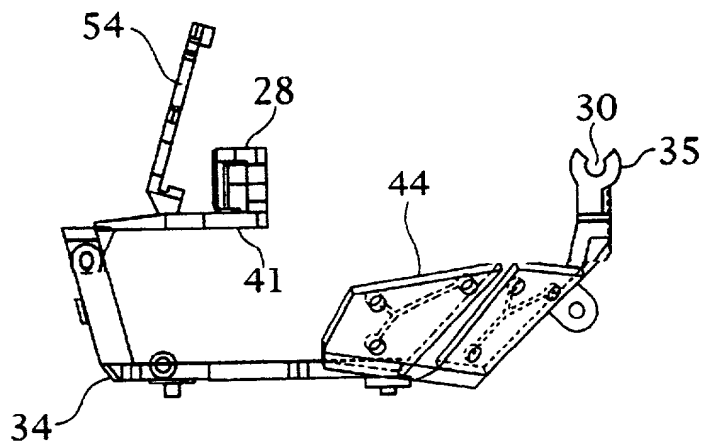


FIG. 29

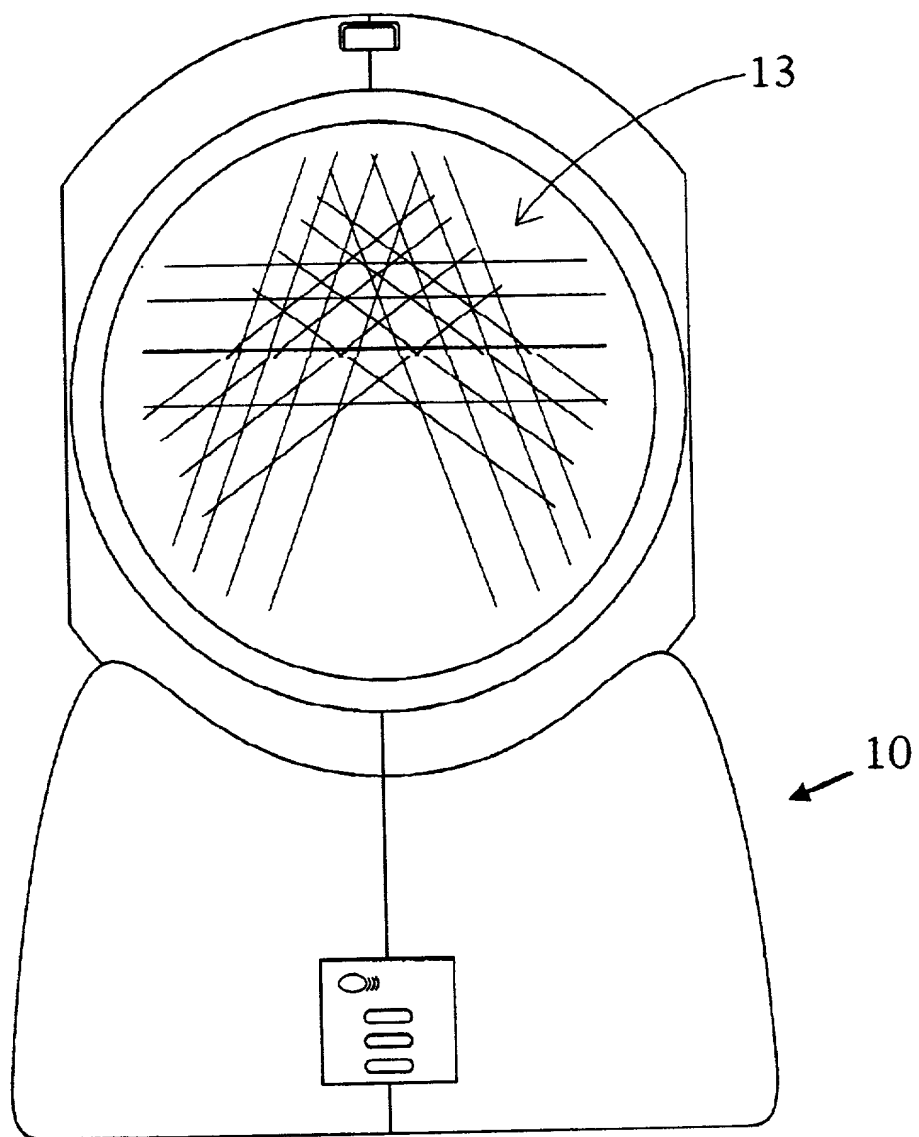


FIG. 30

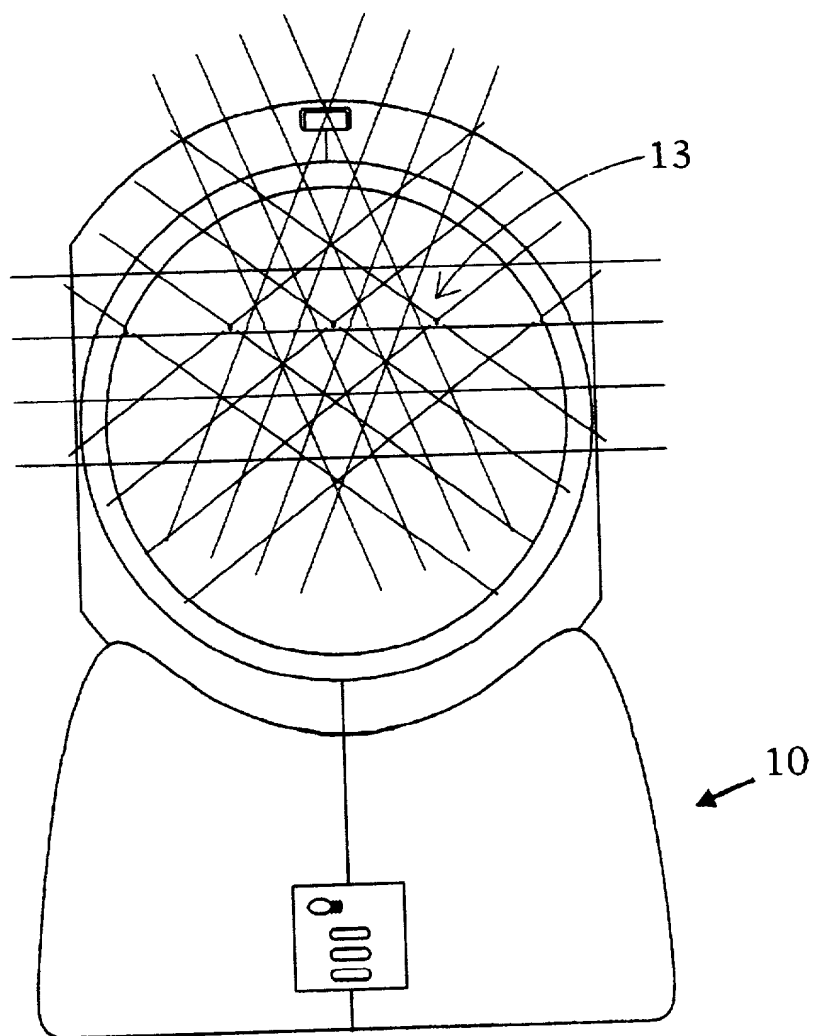


FIG. 31